



### RSIC-DC04X2

The **RSIC-DC04X2®** are very versatile products. The most common use is the decoupling of wall systems, isolating ceilings, and mechanical vibration control. The design of the RSIC-DC04X2® can be used in new construction or retrofit. Below are some examples of the possible uses for the RSIC-DC04X2® .





- Dropped Ceiling
- Garage Door Motor Isolation
- Garage Door Rail Isolation
- Decoupled connector for isolating walls built within another wall
- Speaker Isolators
- Vent Fan Isolators
- Recessed Lighting Isolators
- Projector Mount Isolators
- Electrical Box or Ceiling Fan Isolators

Wood
Steel
Metal Deck

Steel
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

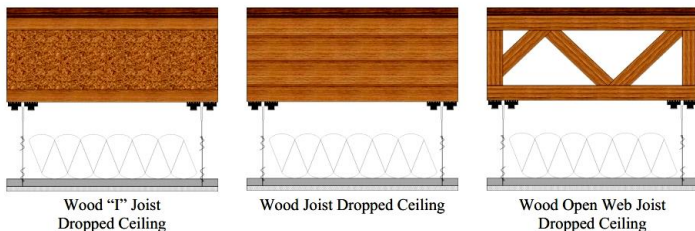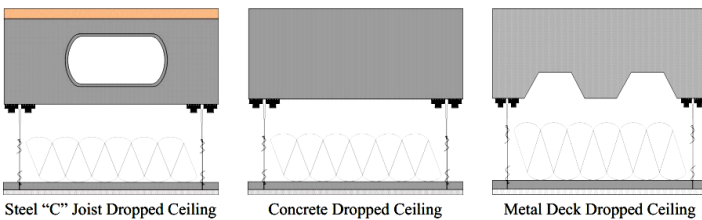

### RSIC-DC04X2 specifications:

Made in the USA	YES
Acoustical design load:	72 lbs
Total deflection	3 mm
Double deflection	YES
Made with Recycled content	YES
Cryo low VOC treated	YES
Adjustable	YES
Cavity min	4-1/2"
Cavity Max	Var.
Adjustment limit	Var.
Use on Ceilings	YES
Use on walls	YES
New Construction	YES
Retro Fit	YES